

Item No. XS-O2Dxxxxxxxxxx

pascom O2xS door handle

Mounting without additional drilling and without wiring



Set includes

- Electronic door handle
- Spindle
- Mechanical door handle
- Battery and Allen key

The pascom O^2xS door handle is compatible with many European lock standards. The different versions allow the use in all common doors, such as wood, steel and aluminium as well as narrow frame doors with a backset of more than 20 mm.

An extensive wiring is not necessary and existing holes can be generally used.

The reader unit with communication electronics as well as the mechanics and the power supply is located directly in the door handle.

A low battery status is signaled acoustically when actuated. Replacement of the battery is possible in an assembled condition by a simple tool.

Technical specifications

Transponder: Java Card/MIFARE

ISO14443/13,56 MHz

Power supply: battery,

1 piece, CR 123A 3V

Mounting location: indoor,

outdoor (IP66)

Operating temperature: indoor: +5 °C to +55 °C


outdoor: -25 °C to +65 °C

Storage temperature: -40 °C to +65 °C Casing: stainless steel

Prepared for pascom FSM online module LAN

Versions*


- Forms of handles: form L, form U square or form U round
- Handle directions: outside right / inside left outside left / inside right
- Version for indoor and outdoor (IP66 optional)
- Suitable for use in fire and smoke resistant doors (optional)
- Handle roses: round or oval
- Spindles suitable for all doors with a thickness of 30 mm up to 110 mm
- Key roses: round or oval, blind or PZ

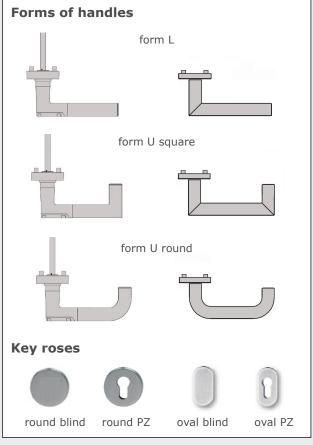



* Prices and item no. vary depending on the design variant





Version Handle with round rose

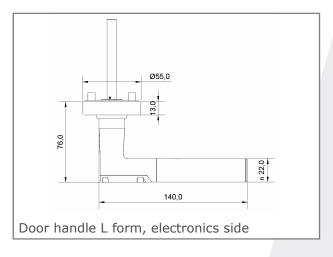


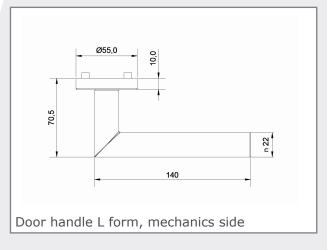

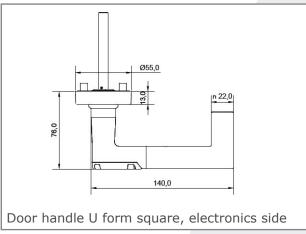

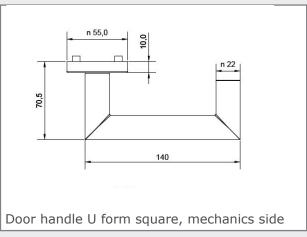

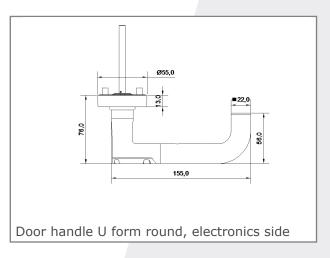


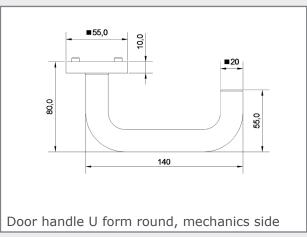



Dimensions in mm


PASCOM


Version Handle with oval rose

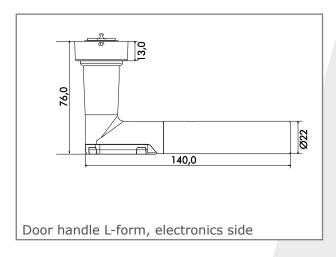


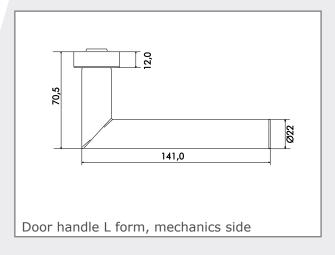

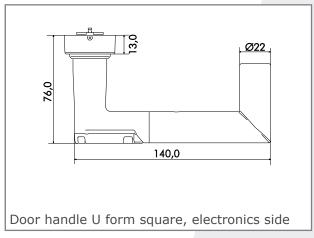

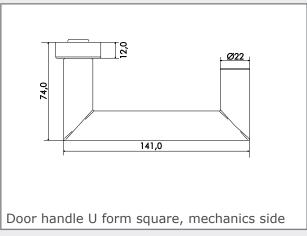

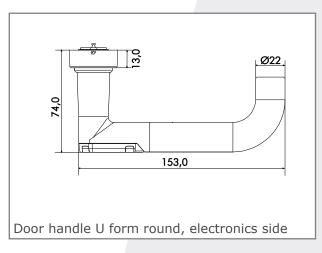

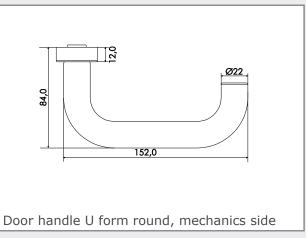

Dimensions in mm