

Item No. XS-O2.R00002K100

# pascom XS.Reader

Transponder reader for XS.io/XS.net control module



Design gray




Color variant white  
Item No. XS-O2.R00001K100

In combination with the XS.net/io control module, the pascom XS.Reader enables secure access control to the premises.

The built-in transponder is connected to the XS.net/io control module via an RS232 or RS485 interface.

## Technical specifications

Transponder	13.56 MHz Mifare Classic, JCOP
Interface	RS232 / RS485
Color:	
casing front	RAL 9010 pure white
casing bottom	RAL 7016 anthracite gray
Foil color	RAL 7037 gray (variant: RAL 9010 white)
Casing:	
Dimensions:	84 x 88 x 15 mm (WxHxD) Suitable for standard flush-mounted box, Optionally, a suitable surface-mounted housing is available.
Type of protection	IP 54
Power supply	12-24V
Power consumption	max. 2 Watt
Operating temperature	-20 to +70 °C
Storage temperature	-20 to +70 °C
LED	orange / red / green
Manufacture	CE compliant

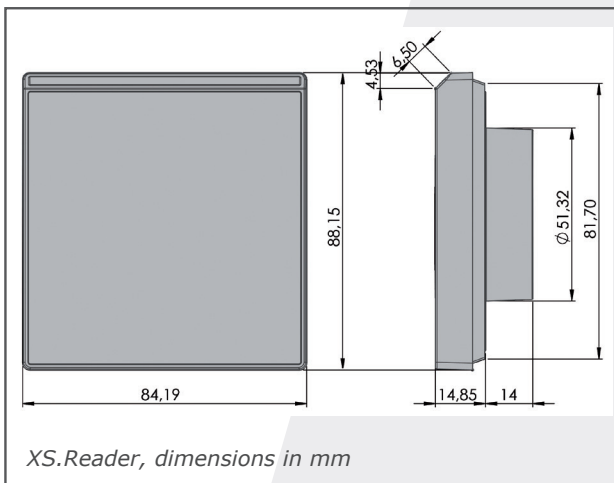

XS.Reader, dimensions in mm