

Item No. TA-MB04xxxxxx

pascom MediaBox 04

Easy to handle patient phone with integrated card reader

The pascom MediaBox 04 is both telephone and remote control for TV, radio, blinds and light in one unit and can be configured for different requirements.

Because of the ergonomic shape of the handset and the well-designed key layout, the device can be easily operated with one hand.

People with a handicap in the fine motor skills or eyesight can operate the device easily through the simply selectable buttons. If the motion sensor is activated, the display lighting automatically switches on.

The phone is equipped with a button for calling the nurse in emergencies. Depending on the nurse call system you can have a conversation with the nurse by pushing this button.

Benefits

- Remote control for TV and radio
- Button for room light control
- Two freely programmable special function keys (eg for blinds, service call)
- Nurse call button (with or without intercom, depending on the nurse call system)
- Foil keyboard (with tactile feedback)
- Display of the patient's SmartCard account balance or display of information*
- Central configuration of devices*
- Motion Sensor: The backlight of the display is switched on automatically when moving (can be disabled if desired).
- Display of caller's number
- Integrated card reader
- The device automatically detects the headphones by plugging.



Technical specifications

Weight: about 150 g

Dimensions (HxWxD): 184 x 62 x 21 mm

Power supply: 12-24 V

Power Consumption: 3 W Telephone system: analog

Stereo headsets: 3.5mm connector

Interface: RS232 Interface

for controlling a TV set

Currently supported nurse call:

Ackermann, EFE, Schrack Seconet, Tunstall,

Zettler

Casing: plastic (ABS)

Cleaning and care:

The housing is resistant to wiping disinfectant (Tested: Bacillol 30 Sensitive Foam, Bacillol 30 Foam, Mikrozid AF Liquid).


Version 1.1 | Valid from 08.11.2022 Changes and errors reserved

^{*} To use this features, an additional software module is required.



Keys description

At full scale (different versions available)

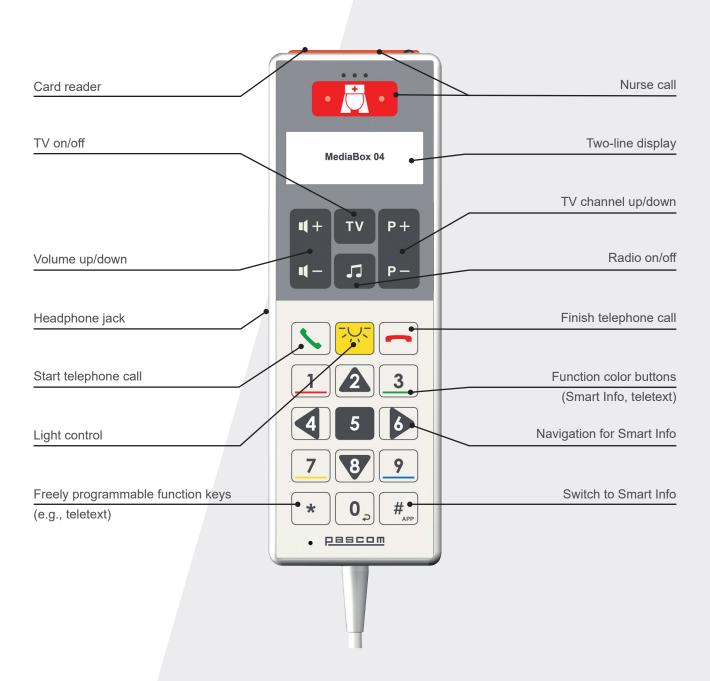

Version 1.1 | Valid from 08.11.2022 Changes and errors reserved